




NELLIS REUSE WATERLINE

- Install 12,100 feet of 10 inch pipe
- Supply irrigation water to 2 ponds located at NAFB golf course area
- Reuse water supplied to Nellis will vary from 0.5 to 2.2 mgd
- Construction Progress is 33% Complete
- Construction Cost is \$3.1M



PROPOSED FLOW EQUALIZATION BASIN

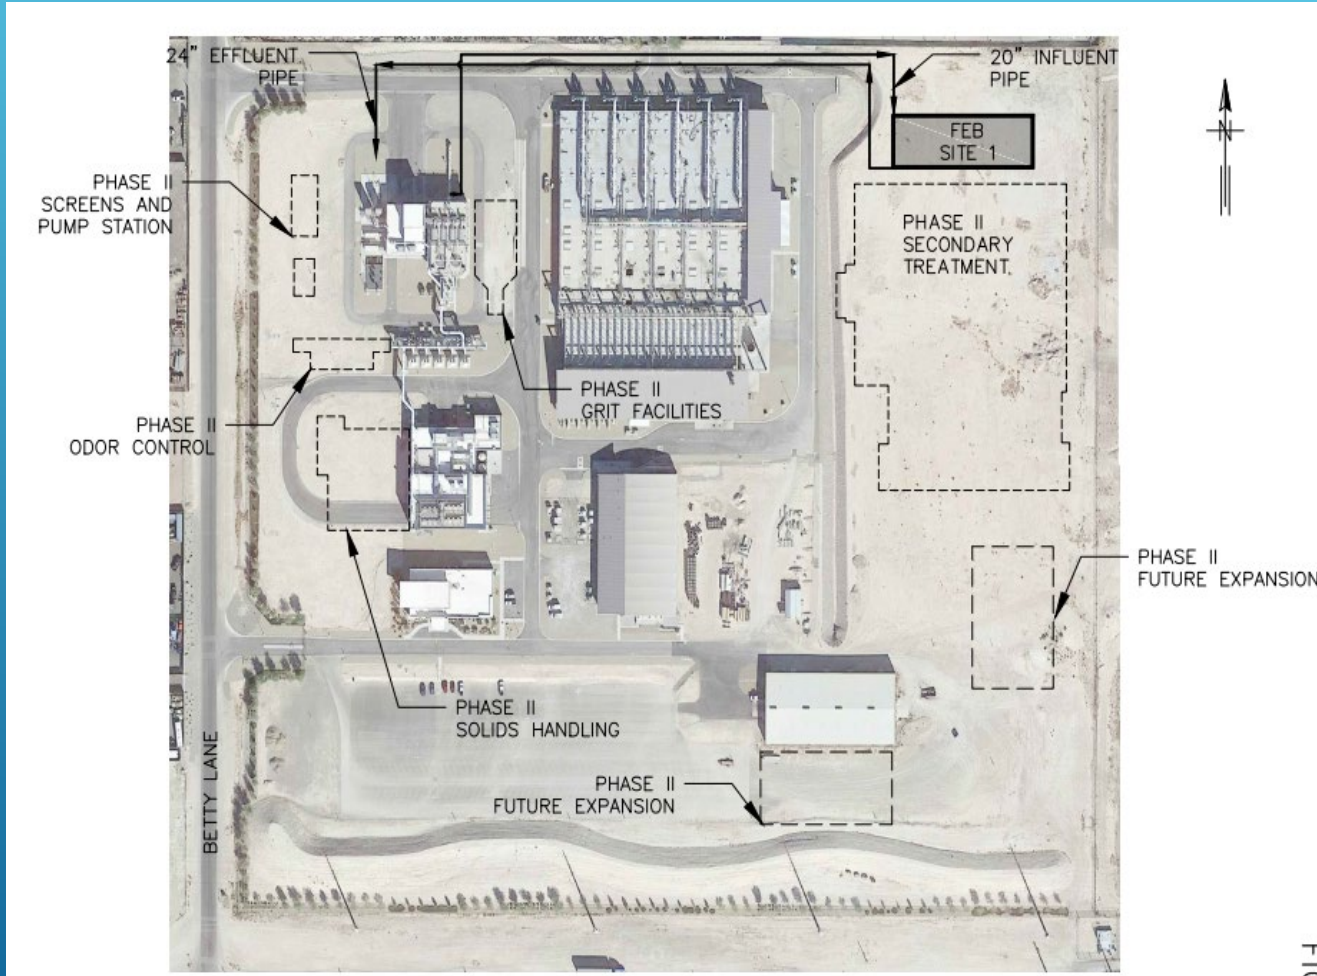

- Completed the Feasibility Study
- Optimal On-Site Location - NE
- Sizing – 2.2 MG
- General Layout
 - 3-cell Configuration
 - Gravity Flow
 - Diffusers and mixers
- Odor Control System